

Twinserter OUTSERTER COLLATOR



The Twinserter pharmaceutical outserter from MGS Machine is designed to collate and then glue multiple outserts together together to create a bundle of information to support sample drug pack FDA conformance requirements. This bundle can then be attached to bottles and cartons using the the MGS Sidewinder or MGS Topserter.

FEATURES & BENEFITS

- Operating speeds up to 220 Twinserts per minute.
- Typically done off-line, this **stand-alone, self contained system** benefits both the packager & manufacturer.
- Assembled package responds to **strict FDA guidelines for labels & inserts.**
- Eliminates the need for multiple feed stations, **resulting in packaging process cost savings.**
- Product magazines can be continuously loaded while machine is operating.
- **Patented rotary motion** is a proven design with years of field tested experience.
- No Product-No Placement feature **reduces production waste.**
- **Easy-to-operate** control panel with illuminated display for missed detection fault.
- **Tool-less changeovers** can be accomplished in minutes.
- Construction fully supports ANSI/PMMA B155.1-2006 safety and cGMP guidelines.



IMPACT AUTOMATION SOLUTIONS

Unit 2 • 52 Holker St Silverwater NSW 2128 Australia • T +61 (0)2 9648 6000 W www.impactautomation.com.au
Agents for: MGS, Lakewood Process Machinery, AZCO, A-One Packaging, Modular Packaging, and more

Twinsserter OUTSERTER COLLATOR



BASE MACHINE

- Eight-Foot Long Lugged Chain with Disappearing Flights
- Two Rotary Feed Stations with 762 mm Inclined Magazines
- Nordson Pro Blue with Two Hoses and Heads
- Variable speed Main Drive Motor
- Quick Removable "Forming Chamber" for maintenance and changeover
- Non-Powered Compression Section
- No-Tool Adjustable Slideguides
- Vacuum Pump
- Message Display

OPTIONAL FEATURES

- A Machine Orientation
- Four-Foot Powered Magazine
- Bar Code Scanner
- Low-Level Magazine Sensors
- Product Reject Station with Reject Verification
- Venturi Vacuum System
- Three-Element Stack Light
- Lot and Batch Counters
- Casters
- Commissioning Documentation Package
- Discharge Options Include:
 - Catch bin
 - Shingling Conveyor
 - Finished Product Upender/Grouper
 - Automatic Tray Loader


SPECIFICATIONS

- POWER: 230 VAC, 3 Ph, 50/60 Hz
- OUTPUT: Up to 220 Twinserts per minute
- AIR: 90 PSI minimum
- VACUUM: Up to 10 SCFM at 508mm HG
(If optional pump is not included)

PRODUCT SIZE RANGE

Inserts, Outserts or Labels on Backing:

- Minimum: 25.4mm - 12.7mm x 25.4mm - 0.76mm
- Maximum: 102mm x 76mm x 10mm

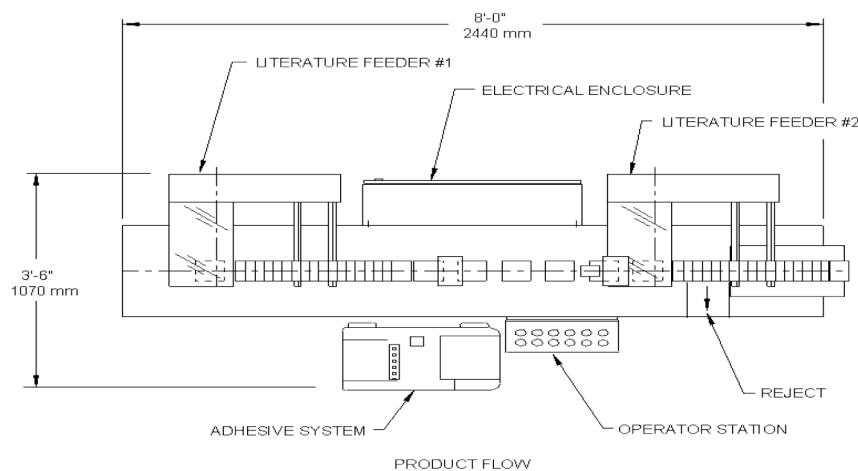

IMPACT AUTOMATION SOLUTIONS

Unit 2 • 52 Holker St Silverwater NSW 2128 Australia • T +61 (0)2 9648 6000 W www.impactautomation.com.au
Agents for: MGS, Lakewood Process Machinery, AZCO, A-One Packaging, Modular Packaging, and more